

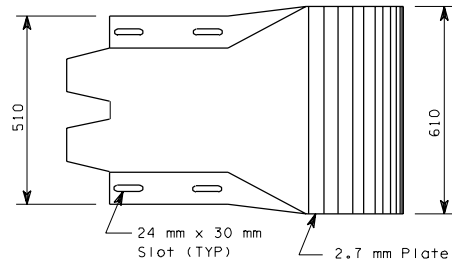
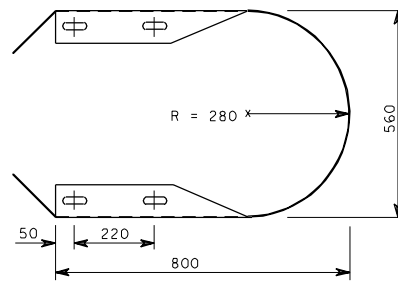



DESIGN C (THRIE BEAM)

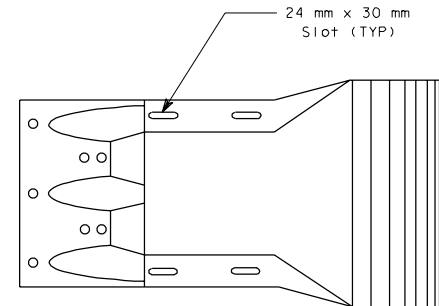

DESIGN D (THRIE BEAM)

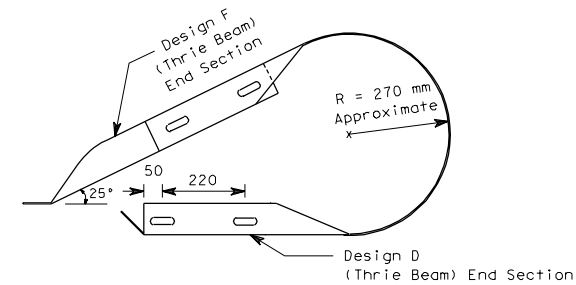

DESIGN G (THRIE BEAM)

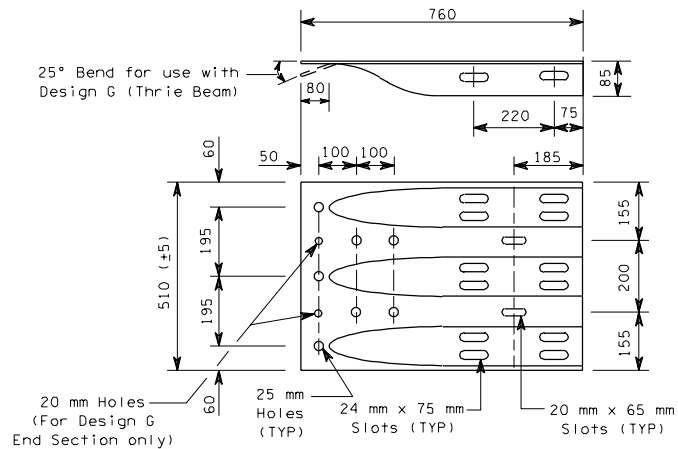

DESIGN F (THRIE BEAM)

## NOTES

1. Bolts shall be high strength, 22 mm, with chemically bonded anchors.
2. In cases where Design F End Section is lapped on the outside of the guardrail, a galvanized 25 mm ID, 50 mm OD, 4.0 mm thick, narrow Type A Plain Washer or an anchor rail washer will be placed under the splice bolt heads.

ALL DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE NOTED

## THRIE BEAM END SECTIONS

## STANDARD PLAN C-7a

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER

DATE

WASHINGTON STATE DEPARTMENT OF TRANSPORTATION  
OLYMPIA, WASHINGTON